


#344 - Rigid Partition Anchor

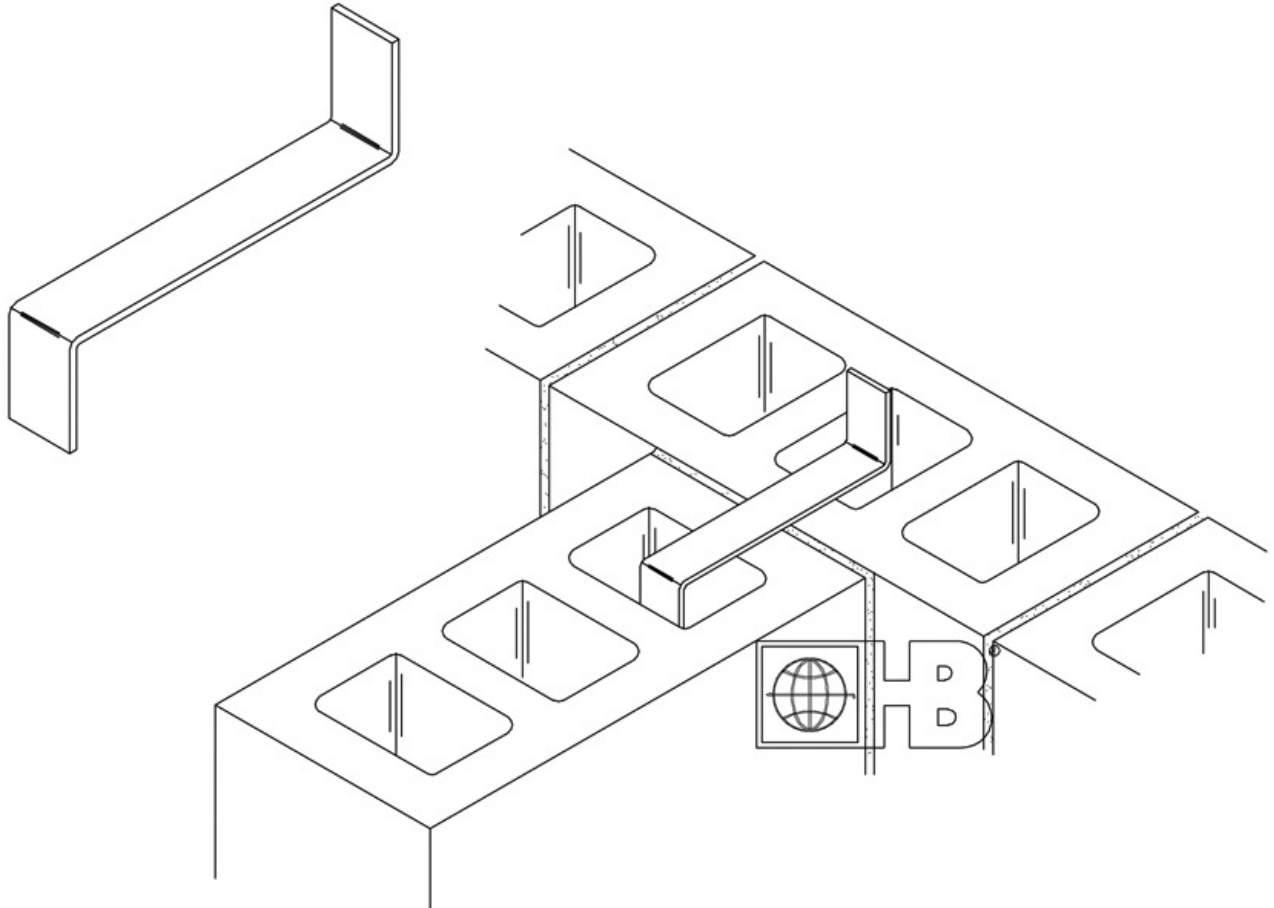

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

STEEL (Carbon Steel):

ASTM A 366; ASTM A 36 (3/16" thick or greater)

Zinc Coating:

ASTM A 153 Class B (sheet metal ties and anchors hot-dip galvanized after fabrication)

Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²

STEEL (Stainless Steel):

ASTM A 167 - AISI Type 304 Stainless Steel (sheet metal ties and anchors); ASTM A 240 (3/16" thick or greater)

THICKNESS:

- 1/8"
- 3/16"
- 1/4"
- OTHER _____

WIDTH:

- 1"
- 1 1/4"
- 1 1/2"
- 2"

FINISH:

- Hot Dip Galvanized
- Stainless Steel

NOTE: Standard Length is 24" with 2" bends. Other sizes available on request.