




VEE-BYNA TIE®

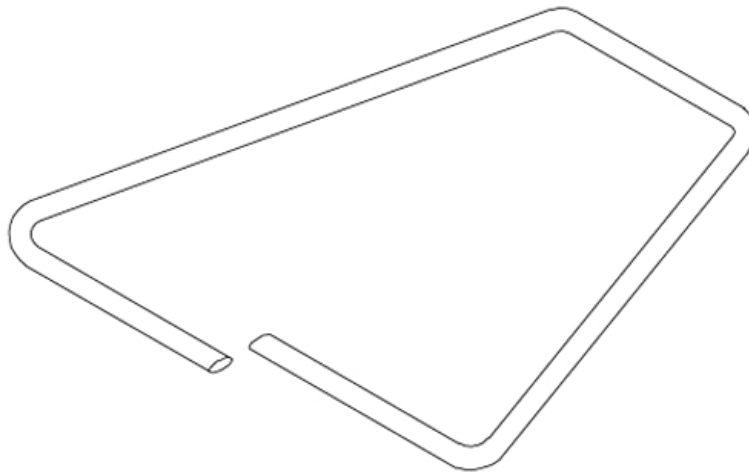

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

WIRE (Carbon Steel):

Cold-drawn steel wire conforming to ASTM A 82:
Tensile strength - 80,000 p.s.i.
Yield Point - 70,000 p.s.i. minimum
Zinc Coating:
Hot-dip galvanized after fabrication: ASTM A 153 (1.5 oz/ft)
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft

WIRE (Stainless Steel):

ASTM A 580 - AISI Type 304. (Type 316 available on special order.)

VEE-BYNA TIE® DIAMETER:

- 3/16"Ø Standard
- 1/4"Ø Heavyweight

VEE-BYNA TIE® LENGTH:

- 3" 3 1/2" 4" 4 1/2" 5"
- OTHER LENGTH _____

FINISH:

- Hot Dip Galvanized
- Stainless Steel

