



Since 1915

Tucker

W. L. TUCKER SUPPLY COMPANY, INC.

"The Best Names In Construction Are Under Our Roof!"

2800 Second St.
Cuyahoga Falls
OH 44221




WWW.WLTUCKER.COM

CALL: 330.928.2155

Product Data

KeeneStone™ Cut 1”

A Masonry Drainage Device



Description

KeeneStone™ Cut 1” is a three dimensional drainage device for 1.0-inch masonry cavity wall applications.

KeeneStone™ Cut products are designed to catch and hold mortar droppings while allowing moisture to pass through and drain out of the wall. The product suspends mortar droppings above the weep holes to prevent the drainage channels from becoming blocked or clogged.

KeeneStone™ Cut 1” is made from nylon and is designed to be 10.0-inches (25.4 cm) high with 7.0-inch (17.8 cm) KeeneStone™ cuts. It is 95% open to provide optimal drainage and ventilation to dry out the wall system.

KeeneStone™ Cut HELPS PREVENT MOLD and does not absorb moisture.

Applications

- ✓ Commercial and residential masonry cavity walls 1.0-inch thick
- ✓ Commercial and residential masonry cavity walls greater than 1.0-inch thick with additional insulation
- ✓ Stone cavity walls

Features and Benefits


Guaranteed to stop moisture from clogging weep holes when properly installed

Simple installation with no mechanical fasteners required

WILL NOT GROW MOLD; prevents fungus and mildew

Polymer core is resistant to most known corrosive chemicals, including solvents

Perfect width to suspend mortar droppings above weep holes, but below the flashing connection to the interior wall

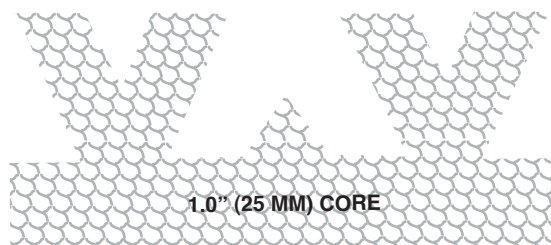

Physical Properties

Description	Means of Measurement English/Metric		Value English/Metric	
Core Polymer	Nylon, UV-Stabilized			
Thickness	Inches	Mm	1.0	25
Length	Feet	Meters	4.0	1.2
Average Opening Size Entangled Net Core	Inches		0.375	

Packaging

Description	Value English/Metric
Pieces Per Box	50 <i>(25 Layers, Pieces are nested into each other)</i>
Box Dimensions	14" x 24" x 49"
In/ft Per Box	200 In/ft
Boxes Per Pallet	14

See installation instructions for methods and procedures.

LIMITED WARRANTY: Keene Building Products, Inc. warrants to the initial purchaser only that the goods sold hereunder will be free from defects in material and workmanship and, except as otherwise set forth herein, will conform to the specifications provided. If any failure to meet this warranty appears within one year from the date of shipment of the goods, on the condition that Keene Building Products, Inc. will correct any such failure by either replacing or repairing any defective goods, at Keene Building Products, Inc.'s option.

The preceding paragraph sets forth the exclusive remedy for all claims based on failure of or defect in the goods sold hereunder, whether such failure or defect arises before or during the warranty period and whether a claim, however instituted, is based on contract, indemnity, warranty, tort (including negligence), strict liability or otherwise. The forgoing warranty is exclusive and is in lieu of all other warranties whether written, oral, implied or statutory.



P.O. Box 241353
Mayfield Heights, OH 44124
Info@KeeneBuilding.com
www.KeeneBuilding.com

877 | 514 | 5336
P 440 | 605 | 1020
F 440 | 605 | 1120